

Image Coming Soon

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Inlet

PL-48518

PRODUCT DESCRIPTION


The Inlet picture light brings a magnetic connection to walls. A rounded bar fits seamlessly within its magnetic arm, allowing the picture light's head to rotate. The angle of the color temperature adjustable LED illumination can be perfectly adjusted to highlight artwork.

FEATURES

- Driver concealed within the canopy
- Rotatable light bar to direct light as desired
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K, 3500K, 4000K, 2700K
CRI	90
Construction	Aluminum frame with acrylic diffuser

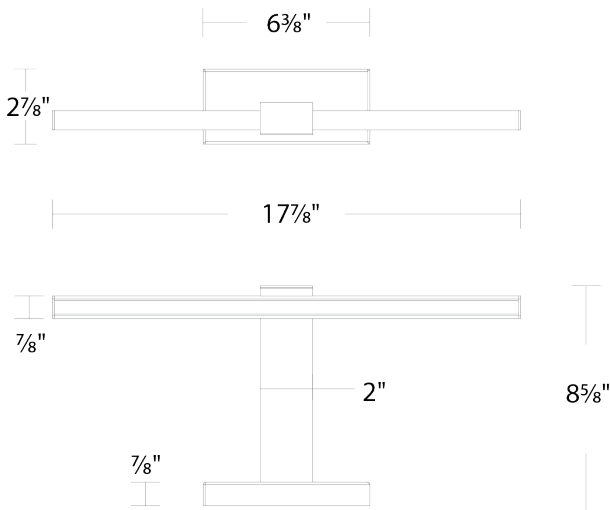

PL-48518

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-48518 18"	2700K	AB Aged Brass	12.3W	379	273
	2700K	BK Black	12.3W	379	273
	3000K	AB Aged Brass	12.3W	389	279
	3000K	BK Black	12.3W	389	279
	3500K	AB Aged Brass	12.3W	393	283
	3500K	BK Black	12.3W	393	283
	4000K	AB Aged Brass	12.3W	395	280
	4000K	BK Black	12.3W	395	280

Example: **PL-48518-40-BK**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Inlet

PL-48524

PRODUCT DESCRIPTION


The Inlet picture light brings a magnetic connection to walls. A rounded bar fits seamlessly within its magnetic arm, allowing the picture light's head to rotate. The angle of the color temperature adjustable LED illumination can be perfectly adjusted to highlight artwork.

FEATURES

- Driver concealed within the canopy
- Rotatable light bar to direct light as desired
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	2700K, 3000K, 3500K, 4000K
CRI	90
Construction	Aluminum frame with acrylic diffuser

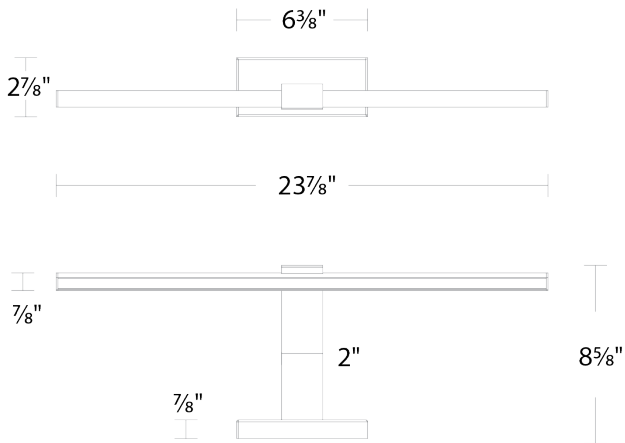

PL-48524

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-48524 24"	2700K	AB Aged Brass	16.4W	542	376
	2700K	BK Black	16.4W	542	376
	3000K	AB Aged Brass	16.4W	552	385
	3000K	BK Black	16.4W	552	385
	3500K	AB Aged Brass	16.4W	553	390
	3500K	BK Black	16.4W	553	390
	4000K	AB Aged Brass	16.4W	552	392
	4000K	BK Black	16.4W	552	392

Example: **PL-48524-40-BK**

For custom requests please contact customs@modernforms.com

Image Coming Soon

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Inlet

PL-48530

PRODUCT DESCRIPTION


The Inlet picture light brings a magnetic connection to walls. A rounded bar fits seamlessly within its magnetic arm, allowing the picture light's head to rotate. The angle of the color temperature adjustable LED illumination can be perfectly adjusted to highlight artwork.

FEATURES

- Driver concealed within the canopy
- Rotatable light bar to direct light as desired
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	2700K, 3000K, 3500K, 4000K
CRI	90
Construction	Aluminum frame with acrylic diffuser

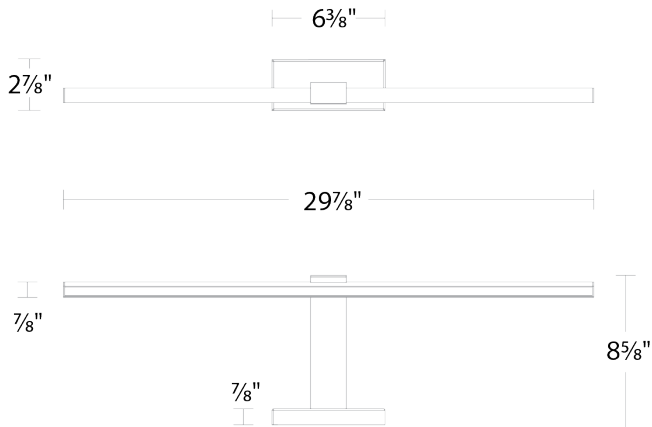

PL-48530

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-48530 30"	2700K	AB Aged Brass	23.8W	775	536
	2700K	BK Black	23.8W	775	536
	3000K	AB Aged Brass	23.8W	788	549
	3000K	BK Black	23.8W	788	549
	3500K	AB Aged Brass	23.8W	790	560
	3500K	BK Black	23.8W	790	560
	4000K	AB Aged Brass	23.8W	788	556
	4000K	BK Black	23.8W	788	556

Example: **PL-48530-40-BK**

For custom requests please contact customs@modernforms.com