



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cinema

PD-30814L

PRODUCT DESCRIPTION

In a luxe finish, the Cinema linear multi-light pendant makes a modern statement that's right in line with the latest trends. Painstakingly V-cut seeded crystal adds understated glamour when it fills with light sourced from high-performance LEDs offering color temperature adjustability. Available in an aged brass or black finish, you can select 14 or 23 lights installed on a linear canopy.

FEATURES


- Driver concealed within the canopy
- V-cut K5 seedy crystal
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-5%
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame with seedy K5 crystal

REPLACEMENT PARTS

RPL-GLA-30816 - Replacement Crystal

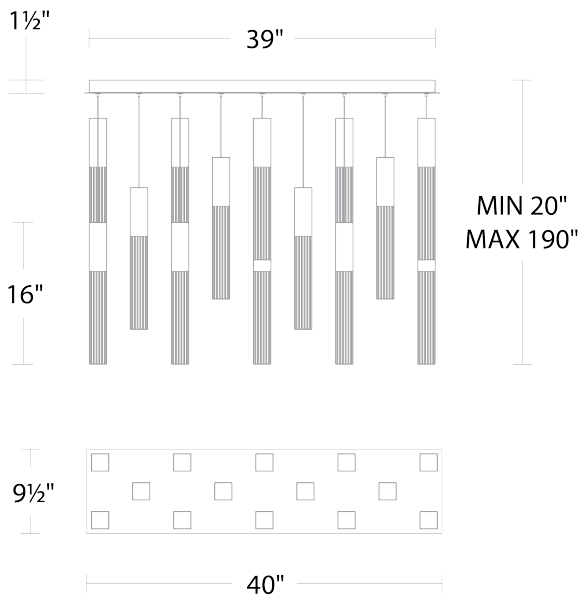

PD-30814L

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-30814L 14 Lights - 14 Lights	2700K/3000K/ 90	95W 95W	4062 4062	AB Aged Brass BK Black
	2700K/3000K/ 90			

Example: **PD-30814L-BK**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cinema

PD-30823L

PRODUCT DESCRIPTION

In a luxe finish, the Cinema linear multi-light pendant makes a modern statement that's right in line with the latest trends. Painstakingly V-cut seeded crystal adds understated glamour when it fills with light sourced from high-performance LEDs offering color temperature adjustability. Available in an aged brass or black finish, you can select 14 or 23 lights installed on a linear canopy.

FEATURES


- Driver concealed within the canopy
- V-cut K5 seedy crystal
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-5%
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame with seedy K5 crystal

REPLACEMENT PARTS

RPL-GLA-30816 - Replacement Crystal

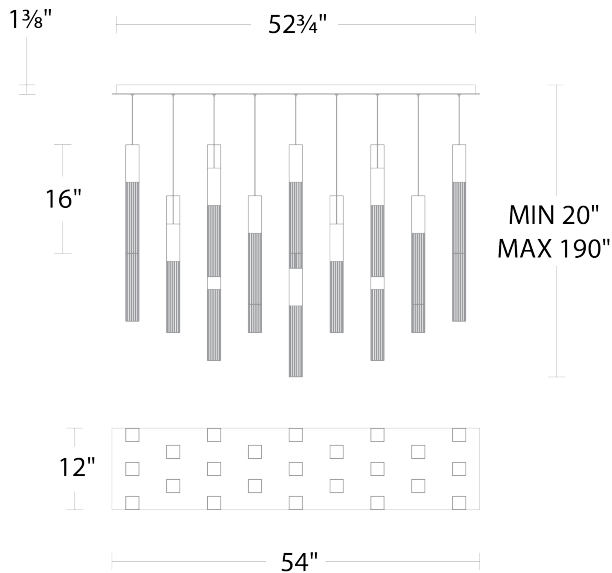

PD-30823L

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-30823L 23 Lights - 23 Lights	2700K/3000K/	156W	6673	AB Aged Brass
	90	156W	6673	BK Black
	2700K/3000K/			
	90			

Example: **PD-30823L-BK**

For custom requests please contact customs@modernforms.com