

Corso Pendant

Pendant 3000K

Model & Size	Color Temp	Finish	Watt	LED Lumens	Delivered Lumens
PD-33718 18"	3000K	AL Brushed Aluminum BK Black WT White	23W	1495	940

Example: **PD-33718-WT**

For custom requests please contact customs@waclighting.com

DESCRIPTION

A promenade of light delivered through a self illuminating halo within. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade. Corso is suspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to different lengths through a

FEATURES


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	80
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Rated Life:	75000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with acrylic diffuser



FINISHES:




Brushed
Aluminum

Black

White

LINE DRAWING:

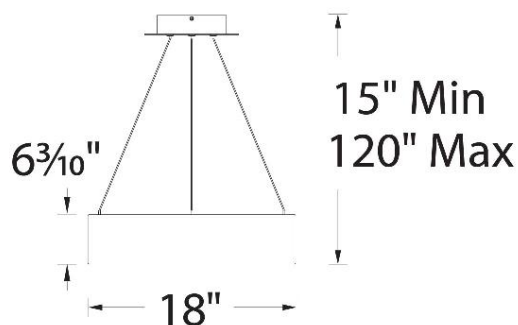

PD-33718

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Corso Pendant

Pendant 3000K

Model & Size	Color Temp	Finish	Watt	LED Lumens	Delivered Lumens
PD-33732 32"	3000K	AL Brushed Aluminum BK Black WT White	88W	6340	4435

Example: **PD-33732-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

A promenade of light delivered through a self illuminating halo within. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade. Corso issuspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to different lengths through a

FEATURES


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC,50/60Hz
CRI:	80
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Rated Life:	75000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with acrylic diffuser



FINISHES:



LINE DRAWING:

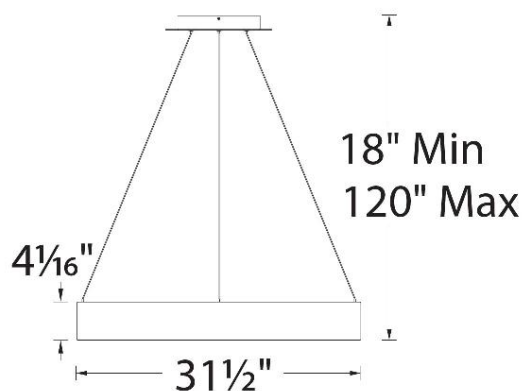

PD-33732

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Corso Pendant

Pendant 3000K

Model & Size	Color Temp	Finish	Watt	LED Lumens	Delivered Lumens
PD-33743 43"	3000K	AL Brushed Aluminum BK Black WT White	125W	11115	7300

Example: **PD-33743-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

A promenade of light delivered through a self illuminating halo within. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade. Corso issuspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to different lengths through a

FEATURES


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC,50/60Hz
CRI:	80
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Rated Life:	75000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with acrylic diffuser



FINISHES:




Brushed
Aluminum

Black

White

LINE DRAWING:

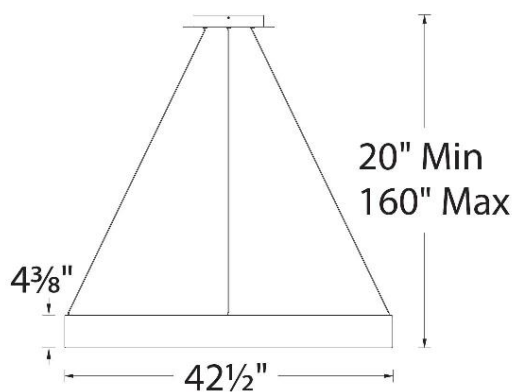

PD-33743

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Corso Pendant

Pendant 3000K

Model & Size	Color Temp	Finish	Watt	LED Lumens	Delivered Lumens
PD-33753 53"	3000K	AL Brushed Aluminum WT White	169W	12028	8458

Example: **PD-33753-WT**

For custom requests please contact customs@waclighting.com

DESCRIPTION

A promenade of light delivered through a self illuminating halo within. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade. Corso issuspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to different lengths through a

FEATURES


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Rated Life:	75000 Hours
Standards:	ETL, cETL,Title 24 JA8-2019 Compliant Damp Location Listed
Construction:	Aluminum body with acrylic diffuser



FINISHES:



LINE DRAWING:

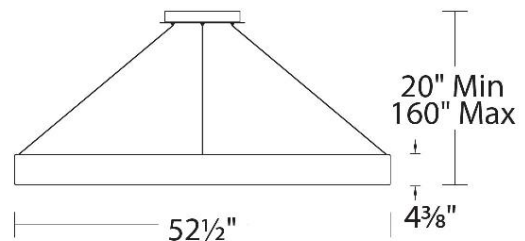

PD-33753